

FRAME					DOORS				
QUANTITY	CONST.	WIDTH	HEIGHT	JAMB DEPTH	QUANTITY (PAIRS)	CONST.	WIDTH	HEIGHT	THICKNESS
	16 GA.			6 1/8"		16 GA.			1 3/4"


NOTES:

- 1) UNITS SHIPPED WITH ALL HARDWARE MOUNTED EXCEPT INTERLOCK
- 2) PLEASE ADVISE "HANDINGS" OF LOCK ROLLER ASSEMBLY (CHECK ONE)




OR
 L.H. (AS SHOWN) R.H.

Note: Door and frames shall be constructed of best quality galvaneal sheet steel of gauges specified.

PLEASE INDICATE WHICH SIDE ROLLER ARM IS ON WHEN VIEWED FROM HALL SIDE

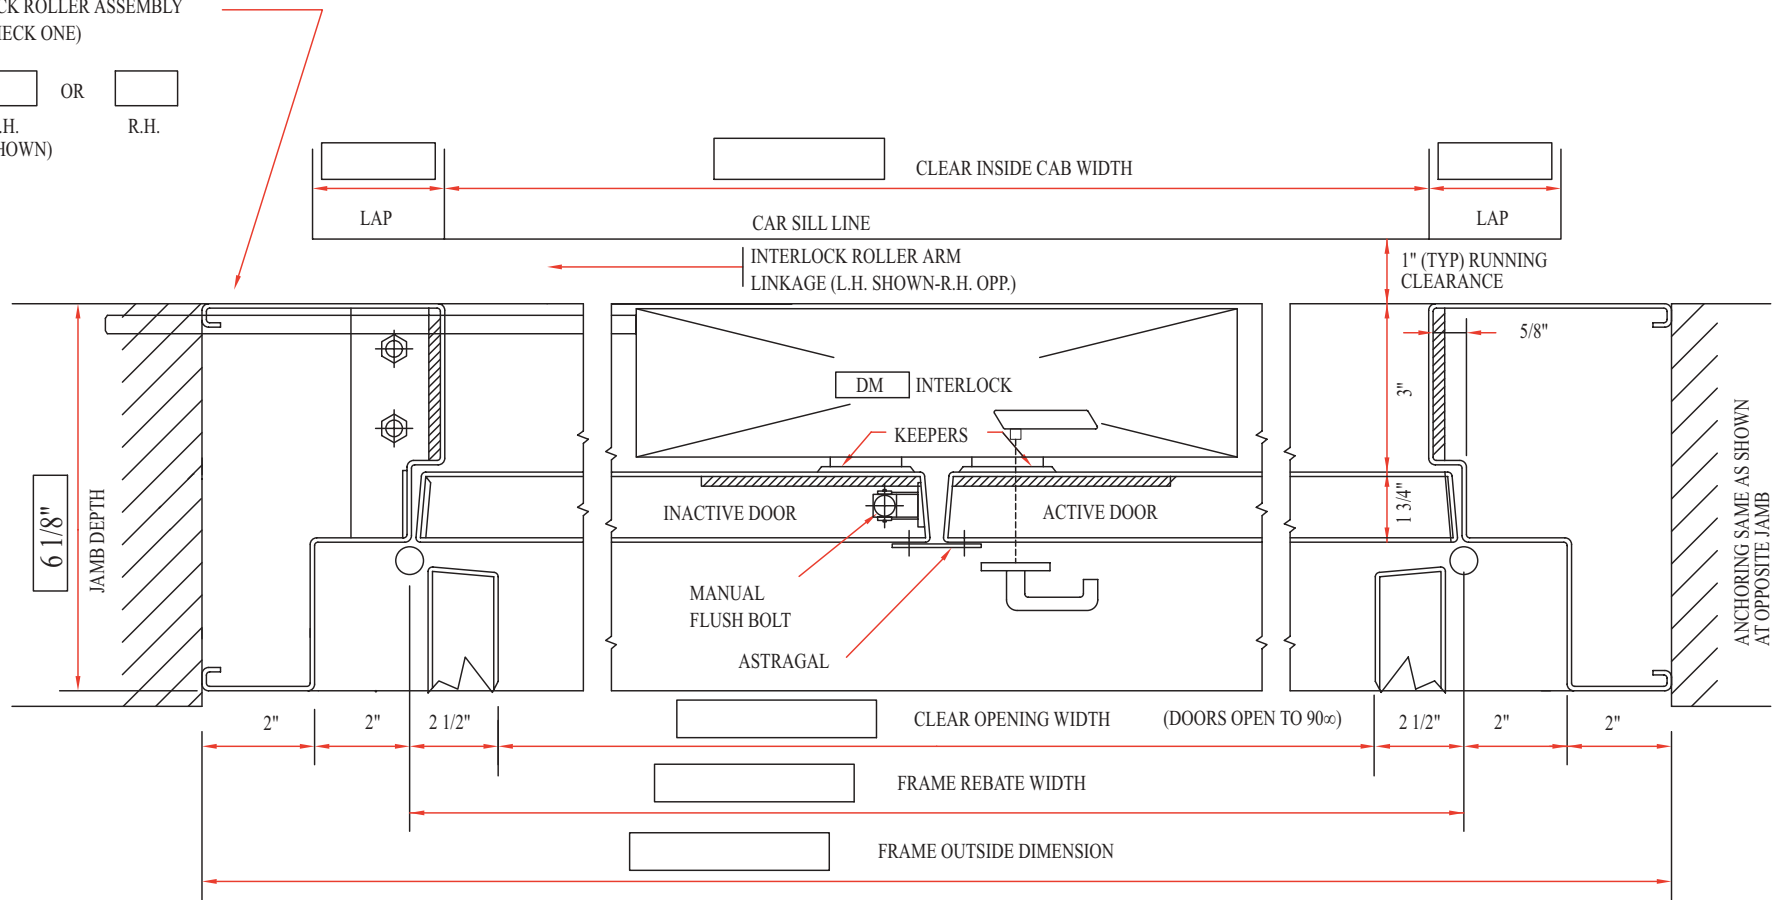

PLAN VIEW

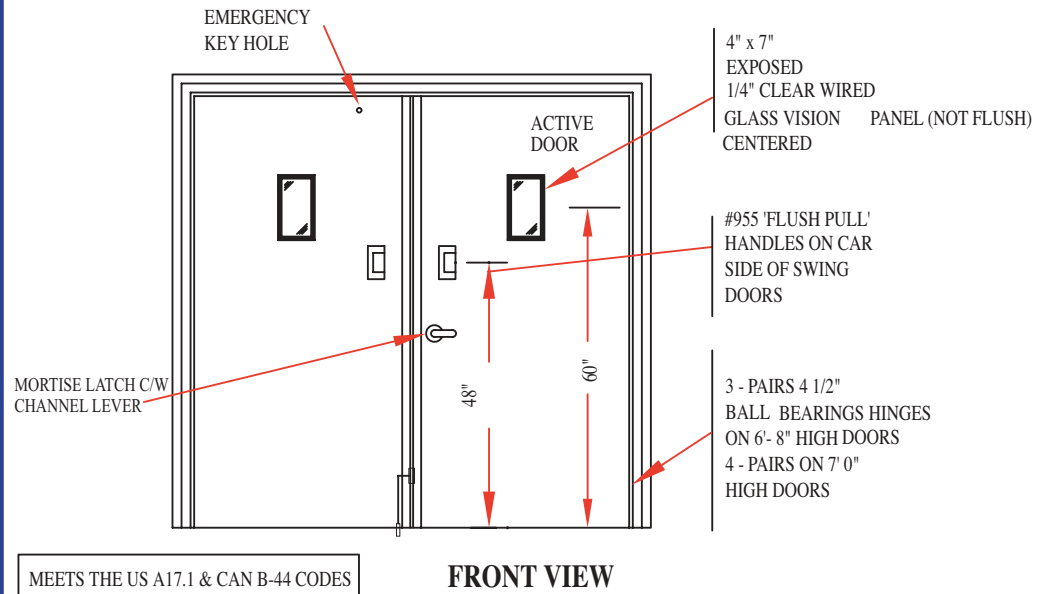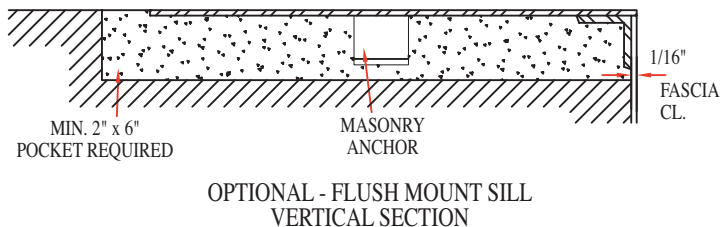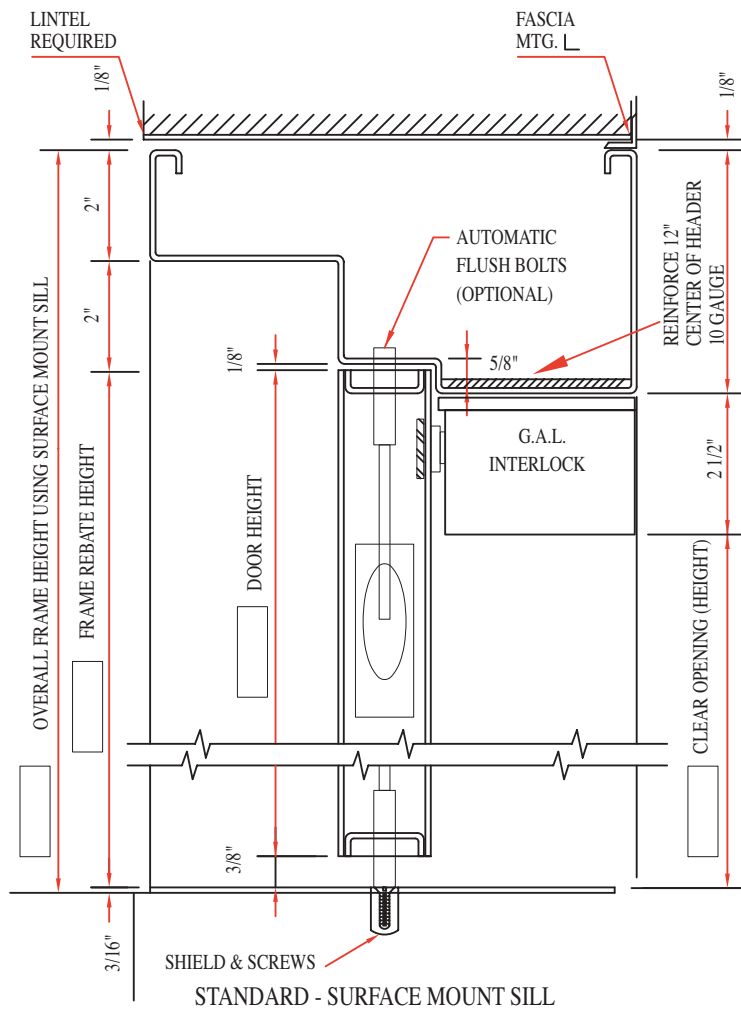

IMPORTANT INFORMATION NEEDED FROM INSTALLING CONTRACTOR:

- Q. WHAT IS MAXIMUM ROUGH OPENING AVAILABLE? _____ WIDE x _____ HIGH
 (NOTE: PROVIDE AS MUCH ROUGH OPENING AS POSSIBLE FOR GOOD FASTENING AND SATISFACTORY INSTALLATION)
- Q. WHEN ENTRANCE IS SET IN PLACE, DISTANCE FROM HATCH SIDE OF CLOSED DOOR TO CAR SILL (INCHES)? _____
- Q. (A) WILL FRAMES BE ATTACHED TO BUILDING STRUCTURE BY DRYWALL, BRICK/CONC. BLOCK? _____
 IF SO - WALL THICKNESS
- (B) WELDED TO STEEL CHANNELS? _____
 IF SO - SIZE OF CHANNELS
- (C) OTHER METHOD (SPECIFY) _____

- Q. WHAT IS CLEAR INSIDE (WIDTH) OF CAR? (FREIGHT ONLY) _____
- Q. WHERE IS (OR WILL BE) LOCATION OF CAM WHICH WILL UNLOCK DOOR INTERLOCKS? (VIEWED FROM HALL SIDE) LH RH