



FRAME					DOORS				
QUANTITY	CONST.	WIDTH	HEIGHT	JAMB DEPTH	QUANTITY (PAIRS)	CONST.	WIDTH	HEIGHT	THICKNESS
	16 GA.			6 1/8"		16 GA.			1 3/4"


Note: Door and frames shall be constructed of best quality galvaneal sheet steel of gauges specified.

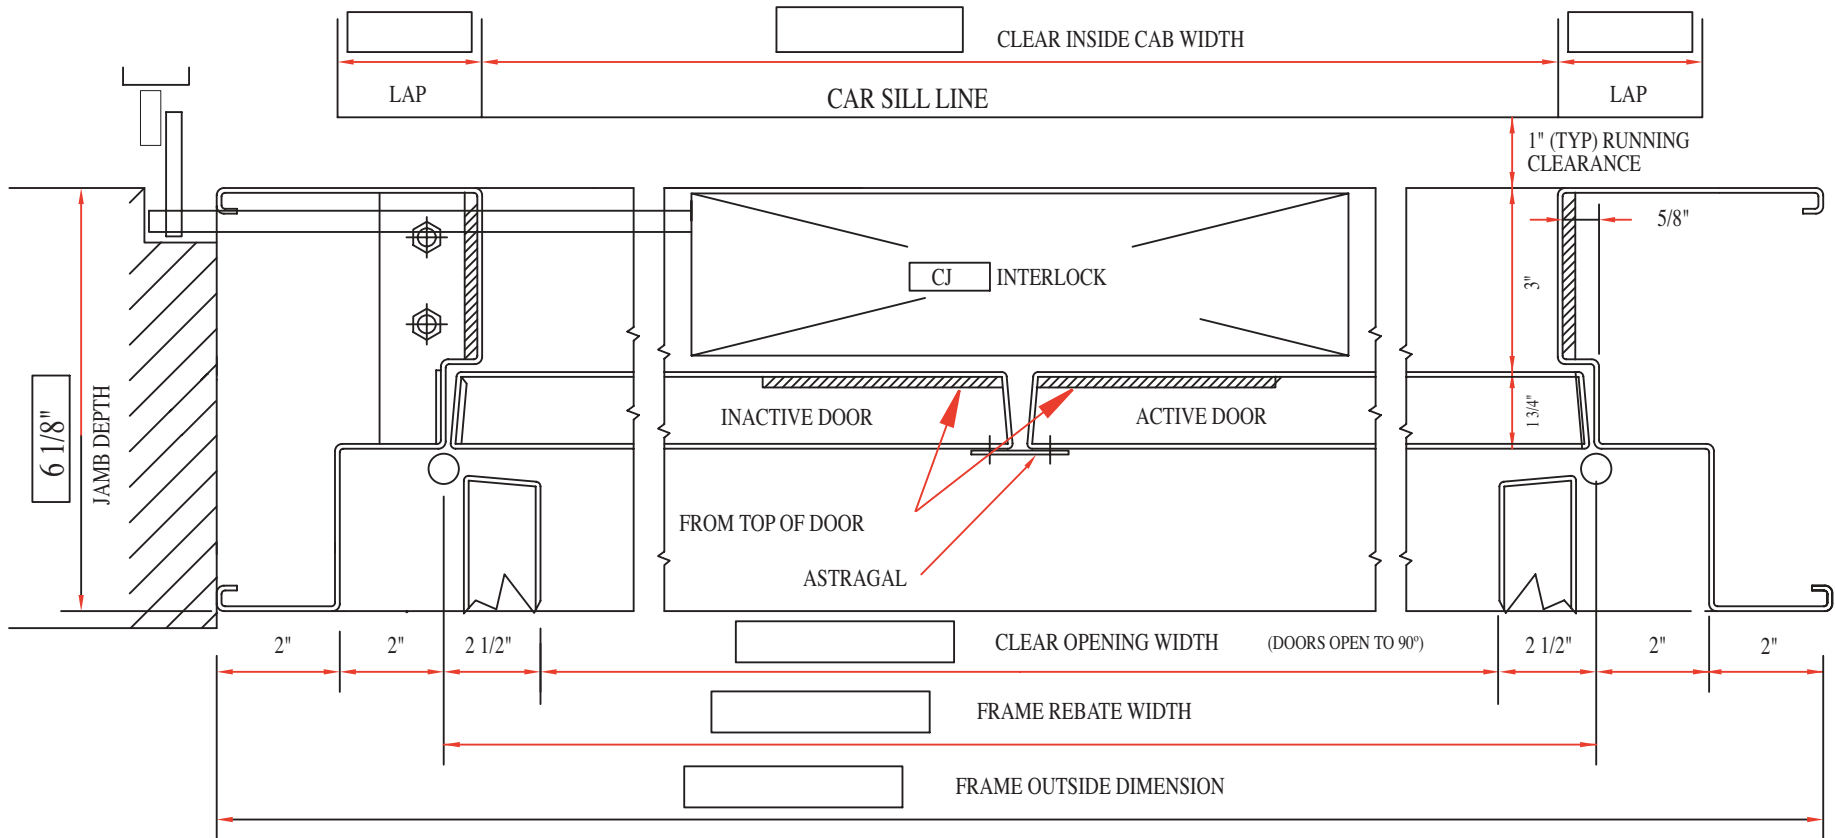

PLAN VIEW

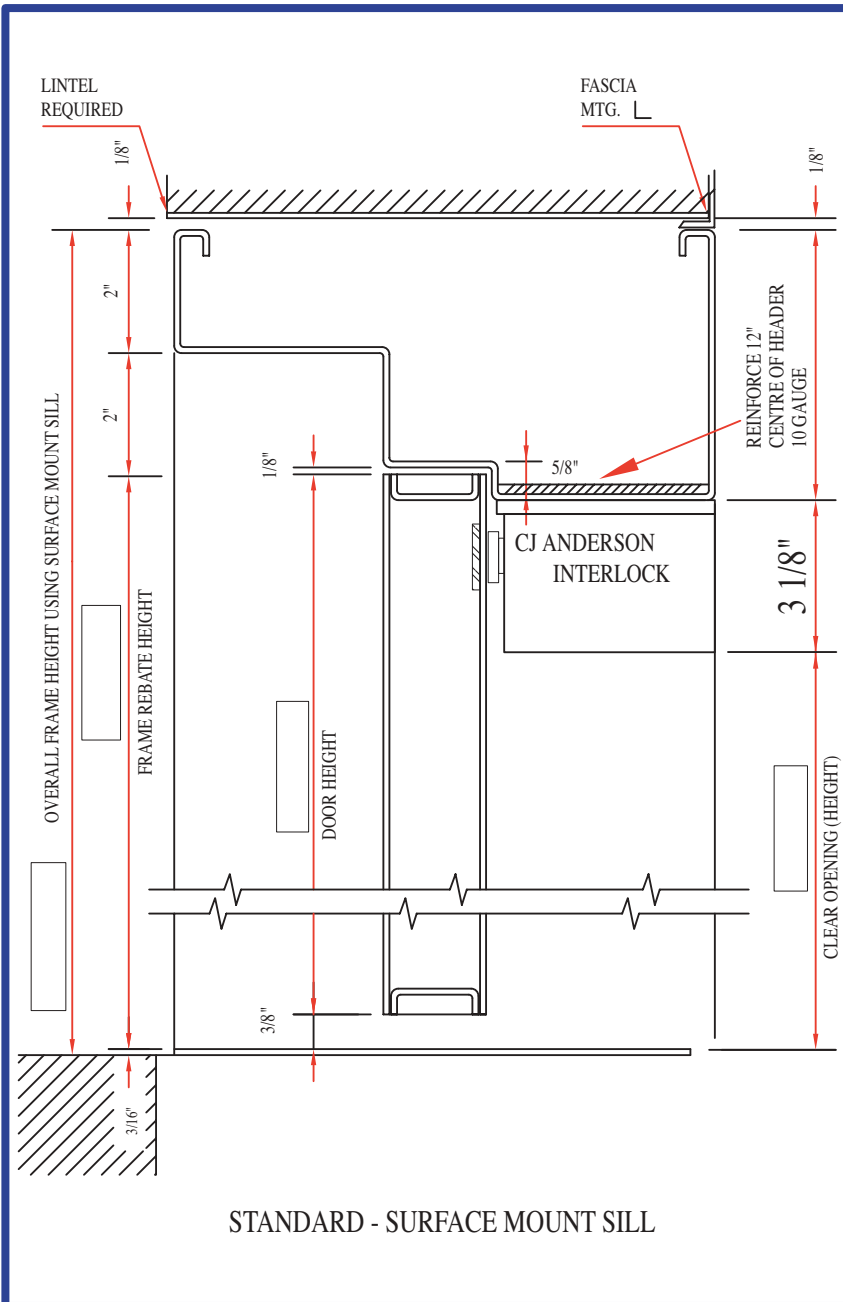

STANDARD - SURFACE MOUNT SILL

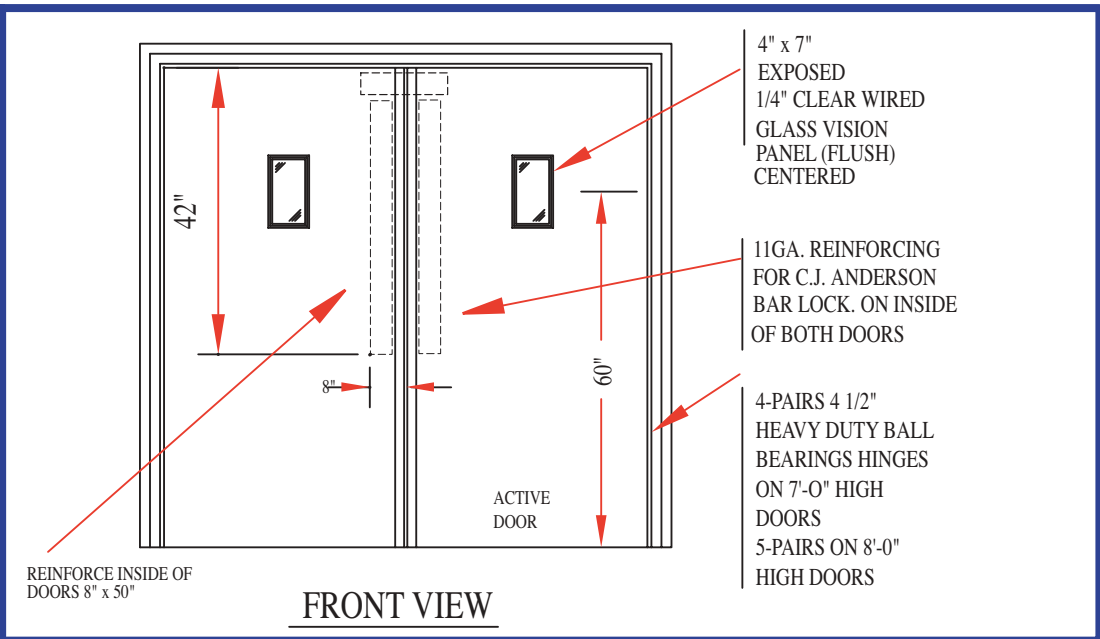

FRONT VIEW

IMPORTANT INFORMATION NEEDED FROM INSTALLING CONTRACTOR:

- Q. WHAT IS MAXIMUM ROUGH OPENING AVAILABLE? _____ WIDE x _____ HIGH
 (NOTE: PROVIDE AS MUCH ROUGH OPENING AS POSSIBLE FOR GOOD FASTENING AND SATISFACTORY INSTALLATION)
- Q. WHEN ENTRANCE IS SET IN PLACE, DISTANCE FROM HATCH SIDE OF CLOSED DOOR TO CAR SILL (INCHES)? _____
- Q. (A) WILL FRAMES BE ATTACHED TO BUILDING STRUCTURE BY DRYWALL, BRICK/CONC. BLOCK? _____
 IF SO - WALL THICKNESS
- (B) WELDED TO STEEL CHANNELS? _____
 IF SO - SIZE OF CHANNELS
- (C) OTHER METHOD (SPECIFY) _____
- Q. WHAT IS CLEAR INSIDE (WIDTH) OF CAR? _____
 (FREIGHT ONLY)
- Q. WHERE IS (OR WILL BE) LOCATION OF CAM WHICH WILL UNLOCK DOOR INTERLOCKS? (VIEWED FROM LANDING) LH RH

